


ARDEX K 120

Levelling and Smoothing Compound

ARDEX K 120 is a levelling and smoothing compound designed to level and smooth internal sub-floors prior to applying floor finishes. **LOW VOC** 

LOCATION

- Internal sub-floors

SUBSTRATES

- Internal, dry concrete substrates

FLOOR COVERINGS

- Linoleum, vinyl, carpet
- Ceramic and quarry tiles
- Floating Timber

COVERAGE

- 4m² at 3mm thick

THICKNESS

- From 2.5mm to 12mm in one application without aggregate
- For thickness over 12–20mm, mix with a well washed and dried 2–5mm aggregate. Mix with water first then add the aggregate in equal volume to mixed mortar whilst mixing

DRYING TIME


- Allow approximately 2–3 hours at 23°C and 50% relative humidity, before foot traffic
- Conventionally laid carpet and floating floors can be installed after 24 hours
- Direct stick applications such as vinyl flooring after 48 hours. Allow longer for humid climates and low temperatures

PACKAGING

- 20kg bag

CODE

24721

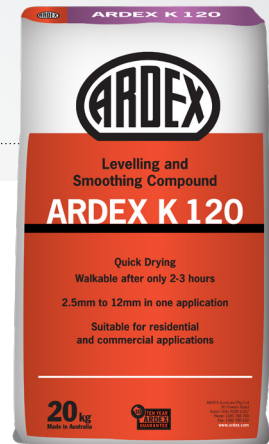

ARDEX K 120 QUICK FACTS

- Quick Drying – walkable after only 2-3 hours
- Level from 2.5mm to 12mm in one application
- Suitable for residential and commercial applications



CONTACT US

1300 788 780 | www.ardexaustralia.com



Download the Ardex app
(search for 'ARDEX Australia')



SYSTEMARDEX
PREMIUM PERFORMANCE