

TPO: GETTING BETTER WITH AGE

TPO has grown up. By any criteria, TPO is no longer the new kid on the block, when it comes to commercial/industrial roofing.

In fact, TPO (Thermoplastic Polyolefin) continues to be the fastest growing commercial roofing membrane on the market today, having grown to over 40% of the installed square metres in the U.S. in the past seven years.

Industry reports show that over 110 million square metres of TPO was installed in 2013. Its growth and market acceptance continue to outpace the overall commercial roofing market. TPO is clearly leading the trend to light-coloured, reflective, energy-efficient, heat-welded single-ply roofing systems.

While TPO can now be considered a mature product, it didn't get there without growing pains. TPO roofing membranes were first used in Europe in the 1980s. In 1992 TPO was introduced to the U.S.. Some manufacturers with little or no experience were attracted to the new TPO market. In its infancy, the TPO industry did not have the strict standards that it has today. In fact, the ASTM standard for TPO is now the most stringent of any single-ply roofing material (see chart below).

Initially, some manufacturers had performance issues resulting in material failures. Formulation trial and error was not uncommon. This left some to question the durability of TPO. Today those issues have largely been eliminated. Many of the early manufacturers are either out of the business or have refined their original formulas and manufacturing process to solve their initial performance problems. The evolution of TPO was very similar to other commercial roofing materials like EPDM and PVC where trial and error has eventually resulted in quality materials over time.



High-quality TPO starts with good chemistry. Good chemistry is essential to engineering the right polymer.

It only took 8 years after its initial introduction for TPO to make serious inroads in the U.S.. One growth factor was the entry into the TPO market by well established companies, such as Firestone Building Products (ARDEX TPO), with significant experience in polymer engineering and manufacturing of rubber products.

	TPO (old ASTM)	TPO (new ASTM)	EPDM	PVC	KEE
ASTM Standard	D6878	D6878	D4637	D4434	D6754
XENON ARC					
Temperature	80°C	80°C	80°C	63°C	63°C
Hours@0.35W/m ²	8,000	8,000	4,000	5,000	5,000
OVEN AGING					
Temperature	116°C	116°C	116°C	80°C	80°C
Days	28	224	28	56	56

The companies that remained along with other key stakeholders have helped drive today's exacting performance specifications. Professional standards have brought a welcomed and necessary degree of credibility to the TPO manufacturing community. Not to mention peace of mind to architects, contractors and building owners.

TPO is a member of the thermoplastic single-ply membrane family, which includes PVC. TPO is a polypropylene based plastic and ethylene/propylene rubber. The plastic and rubber blend enables TPO membranes to be durable and remain flexible even in low temperatures.

There is a common misperception that one TPO is the same as another. This is not true. The major TPO producers each have their own formula/chemistry, product design and manufacturing process. It's important to understand that every manufacturer makes their own version of TPO.

High-quality TPO starts with good chemistry. Good chemistry is essential to engineering the right polymer. This is a critical consideration because the polymer is the backbone of the product. It is the base that allows all the other elements that go into the TPO formula to work together for the desired results.

Technically speaking, the polymer is crucial if the UV stabilisers, fire retardants, titanium dioxide, antioxidants and heat stabilisers are to do their jobs. TPO like all polymers is subject to degradation by UV and heat. This problem is mitigated through the use of stabilisers. Stabilisers slow polymer breakdown. It, too, needs to be compatible and work with all the other formulation components. Incompatibility can lead to premature degradation.

Finding the correct combination of raw materials and a formulation, enabled by the right polymer, is what good chemistry is all about. Perhaps this challenge is one reason why only a handful of companies today have the resources to manufacture TPO.

TPO's acceptance by the commercial roofing marketplace is really no mystery. Once the performance issues were resolved, building owners, architects and contractors could objectively analyse the many benefits of TPO.

TPO single-ply roofing membranes provide exceptional resistance to ozone, ultraviolet rays and some chemical exposure. Achieving these performance characteristics are the result of the individual ingredients that go into the TPO formulation.

Because TPO is a thermoplastic it can be heat welded. This creates a monolithic roof while providing strength and durability.

Ultraviolet light stabilisers are critical in that they provide weathering resistance and long-term strength. Fire retardants like magnesium hydroxide (non-halogenated) provide TPO with fire resistance without negatively affecting the UV stabilisation package or harming the environment.

TPO was originally created to provide the advantages of PVC without the limitations at a better value with less environmental impact.


Titanium dioxide pigments determine the color of the membrane and help provide increased whiteness and reflectivity. Heat stabilisers help resist heat degradation from the manufacturing process and after installation.

PVC (polyvinyl chloride) is another member of the thermoplastic single-ply membrane family. At first glance it is easy to see the similarities of both products. TPO and PVC are thermoplastic materials. Being heat weldable is another important shared characteristic. Heat welds provide a monolithic seam that prevents water intrusion. Both are considered "cool" as a result of their light colour which makes them reflective and resistant to the sun's heat and ultraviolet rays. Buildings with reflective roofs can stay cooler inside and save on air conditioning costs.

The installation processes for TPO and PVC are nearly identical. Both require the same type of attachment materials, tools, procedures and skills. They can be mechanically attached or fully adhered. Both membranes are resistant to chemicals, grease and oil (to varying degrees). They are puncture resistant and can be easily repaired. Both are flexible and designed to conform to the movement of the roof.

On the surface, it could appear that these two thermoplastic family members are very much alike. However, there are major differences. It's in the chemistry where the similarities end. So while TPO and PVC are in the same thermoplastic family, they are chemically unrelated. TPO, is a naturally flexible polymer based material and does not require additives to achieve its flexibility.

WHITE PAPER – TPO: GETTING BETTER WITH AGE

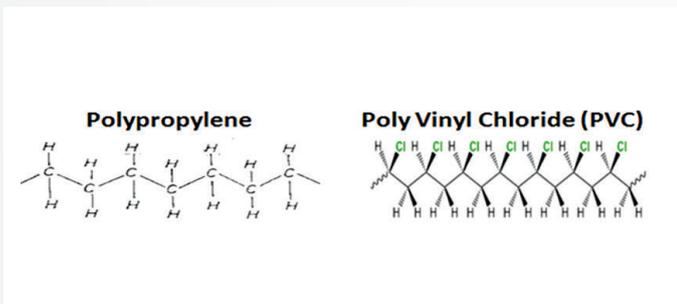

The TPO white reflective membrane meets criteria of LEED®, ENERGYSTAR®, and other environmental programs. No roof lasts forever and one of the major environmental advantages of TPO is that it can be easily recycled with other plastics. The recyclable nature of TPO is a primary consideration for companies committed to the stewardship of our shared planet.

Most people think of PVC as the hard plastic piping they find at the hardware store. This solid, non-flexible state of PVC creates the most significant difference between TPO and PVC.

As a result of its normal hard solid state, PVC, unlike TPO, requires the addition of the aforementioned chemical plasticisers to achieve the pliability necessary to function as a roofing membrane. Plasticisers are an artificial way to give PVC the flexibility that TPO has naturally with no chemical alteration.

This is a negative characteristic of PVC because plasticisers can break down. Plasticisers attract mould or microbes. The microbes eat the plasticisers and tend to attach themselves to the roof, thanks to the food supply. Not only are microbes unwelcome dinner guests, they turn the PVC roof a darker colour and reduce the reflective quality that is so important to energy efficiency.

And since the plasticisers are required to make PVC flexible, the eventual loss of plasticiser results in a more brittle roof as the PVC reverts back to its original hard state. The roof can shrink and become more susceptible to hail damage and more difficult to heat weld while making repairs. This is a major difference between TPO which is naturally flexible.

Decisions on roofing systems are frequently made based on the specifications and physical characteristics of the roof. The question is how long will those physical characteristics last?

As the industry has matured, numerous studies and tests have been conducted to answer that question. One of the most recent and comprehensive studies of thermoplastic membranes, including TPO and PVC, was published in the May/June 2010 issue of RCI Interface Magazine.

Testing was performed and reported by independent consulting firm, Jim D. Koontz & Associates in conjunction with Target Corporation, a national retailer that uses PVC roofing on its own facilities.

The consultant tested 11 single-ply membranes, 5 TPO and 6 PVC from 7 different manufacturers. Testing was for long-term exposure to UV over 18 months. Results found that, "On average, the TPO membranes have a greater propensity for retaining physical properties when compared to PVC, KEE, and EV membranes."

The study provided evidence that TPO under similar conditions will outlast PVC. TPO was originally created to provide the advantages of PVC without the limitations at a better value with less environmental impact. It is hard to objectively argue that it has not achieved its goal with a significant saving of 10–20%. The long term return on investment should be even greater.

WHITE PAPER – TPO: GETTING BETTER WITH AGE

Laboratory testing is helpful and provides a scientific basis for comparison. Nonetheless, the market is the ultimate proving ground and it has made TPO the number one choice in the U.S. for commercial roofing.

The RCI Interface Magazine report confirmed that not all TPOs are alike. As the RCI study indicated, there were substantial variations between the different manufacturers of TPO that were tested. So, how do you know which TPO to choose?

Selecting a manufacturer right for you requires homework. A good place to start is with these questions. How long has the manufacturer been making the membrane? The manufacturer should have a longstanding performance record. How often have they reformulated? Look for a manufacturer with a formula that has not required ongoing experimentation to overcome shortfalls. Does the company have a history of proven results? Can it demonstrate real world applications that are meeting expectations everyday, no matter what the conditions and in every environment?

There are other important common sense considerations, as well. Select a roof system from a manufacturer you have researched and are assured has the products, systems, and know-how to back them up. Research the warranties so you know what is covered and what is not. Check the fine print for temperature restrictions included and limitations on transferability.

Through its evolution manufacturers have learned how to make TPO. Performance and durability are the function of product design, material chemistry and manufacturing process. However, without proper installation, the design, chemistry and manufacturing won't count for much. Be sure the manufacturer has licensed, trained, and experienced professional roofing contractors.

Has TPO grown up? The facts are clear. Take a hard look at TPO, you'll find a roofing product that truly has come of age.

TPO was originally created to provide the advantages of PVC without the limitations at a better value with less environmental impact.

By Michael Mendoza
TPO Product Manager,
Firestone Building Products

Co-Author Hao Wang, Ph.D
Technical Director, Single-Ply Membranes,
Firestone Building Products

ARDEX offers a range of options to supply a full and complete warrantable TPO roof system. Contact an ARDEX technical representative for a complete specification for your project.



■ **ARDEX AUSTRALIA PTY LTD**
7/20 Powers Road, Seven Hills NSW 2147
Phone: 1300 788 780 | Fax: 1300 780 102
Email: technicalservices@ardexaustralia.com
Web: www.ardexaustralia.com

■ **ARDEX NEW ZEALAND LTD**
32 Lane Street, Woolston, Christchurch 8241
Phone: 0800 227 339 | Fax: (03) 384 9779
Email: info@ardexnz.com | Web: www.ardex.co.nz

■ **TOLL FREE TECHNICAL SERVICES**
1800 224 070 (Australia)
0800 227 339 (NZ)