


# ARDEX PU 30

## POLYURETHANE PRIMER AND GREEN SLAB SEALER

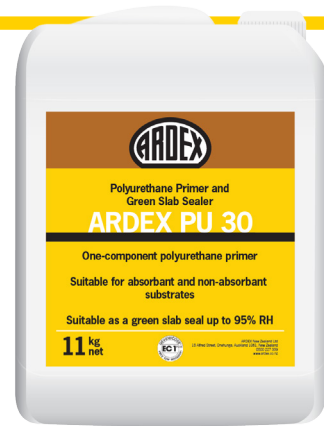

ARDEX PU 30 is a one-component polyurethane primer and green slab sealer for use on internal and external porous and non-porous substrates. ARDEX PU 30 penetrates the surface of the substrate blocking capillary moisture up to 98% RH, while strengthening and consolidating the surface up to 2mm in depth.

### Use

Primer and/or vapour barrier for

- ARDEX polyurethane- and MS-based flooring adhesives
- ARDEX levelling and smoothing compounds when sand broadcast

### Location

- Internal and external application

### Substrates

Porous and non-porous substrates, including;

- Concrete (including green concrete)
- Timber
- Plaster
- Existing ceramic tiles
- Steel

### Coverage

- Primer: 100-150g/m<sup>2</sup>
- Vapour barrier: 250-350g/m<sup>2</sup>

### Drying Time


- Allow each layer of ARDEX PU 30 45 minutes to dry
- Allow a minimum of 2 hours for layers containing a sand broadcast

### Packaging

11kg Container

### Code

22390

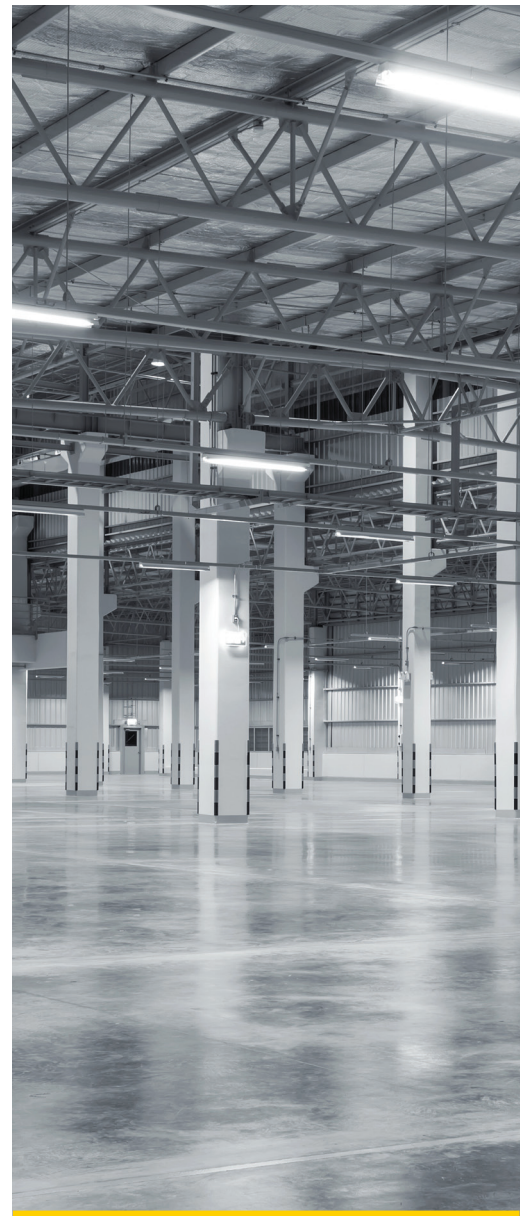

To find out more  
call 0800 227 339 or  
visit [www.ardex.co.nz](http://www.ardex.co.nz)

Download the ARDEX app



search for:  
'ARDEX New Zealand'



SYSTEMARDEX  
PREMIUM PERFORMANCE