


ARDEX RA 142

LOW-VISCOSITY STRUCTURAL INJECTION EPOXY

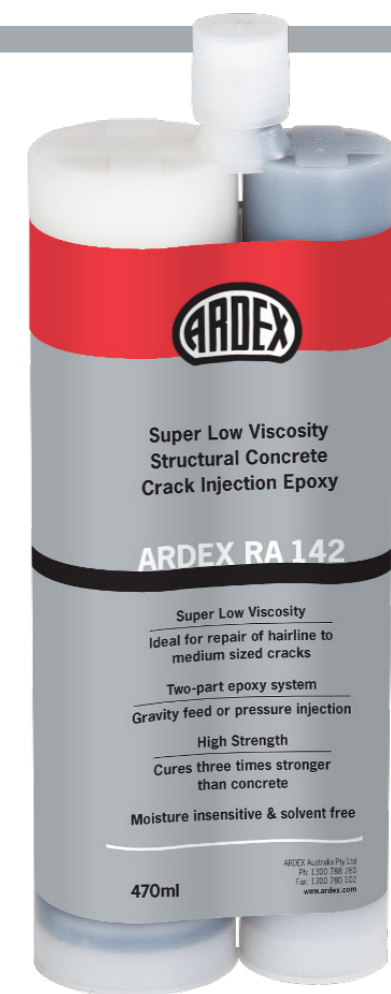

ARDEX RA 142 is a super low viscosity, two-component epoxy adhesive perfect for gravity-feed and pressure injection repair of hairline to fine width horizontal cracks. It can be used in temperatures between 10° to 35°C for a variety of repair projects including vertical crack repair using injection ports in conjunction with a capping paste.

- Super low viscosity for superior crack penetration
- Solvent free
- Low VOC content
- Ideal for 0.05mm - 3mm cracks
- Pressure injection & gravity feed structural crack repair
- Ready to apply - no mixing needed
- Ideal for use with Rhino Concrete Crack Lock

Location

- Internal or external
- Horizontal
- Vertical with injection port system
- Structural applications

Typical uses

- Repair of structural hairline cracks
- Spall repair when mixed with aggregate to create an epoxy mortar

Cure time


- Gel time: 20 mins
- Full cure: 24 hours

Packaging

470mL

Code

22780

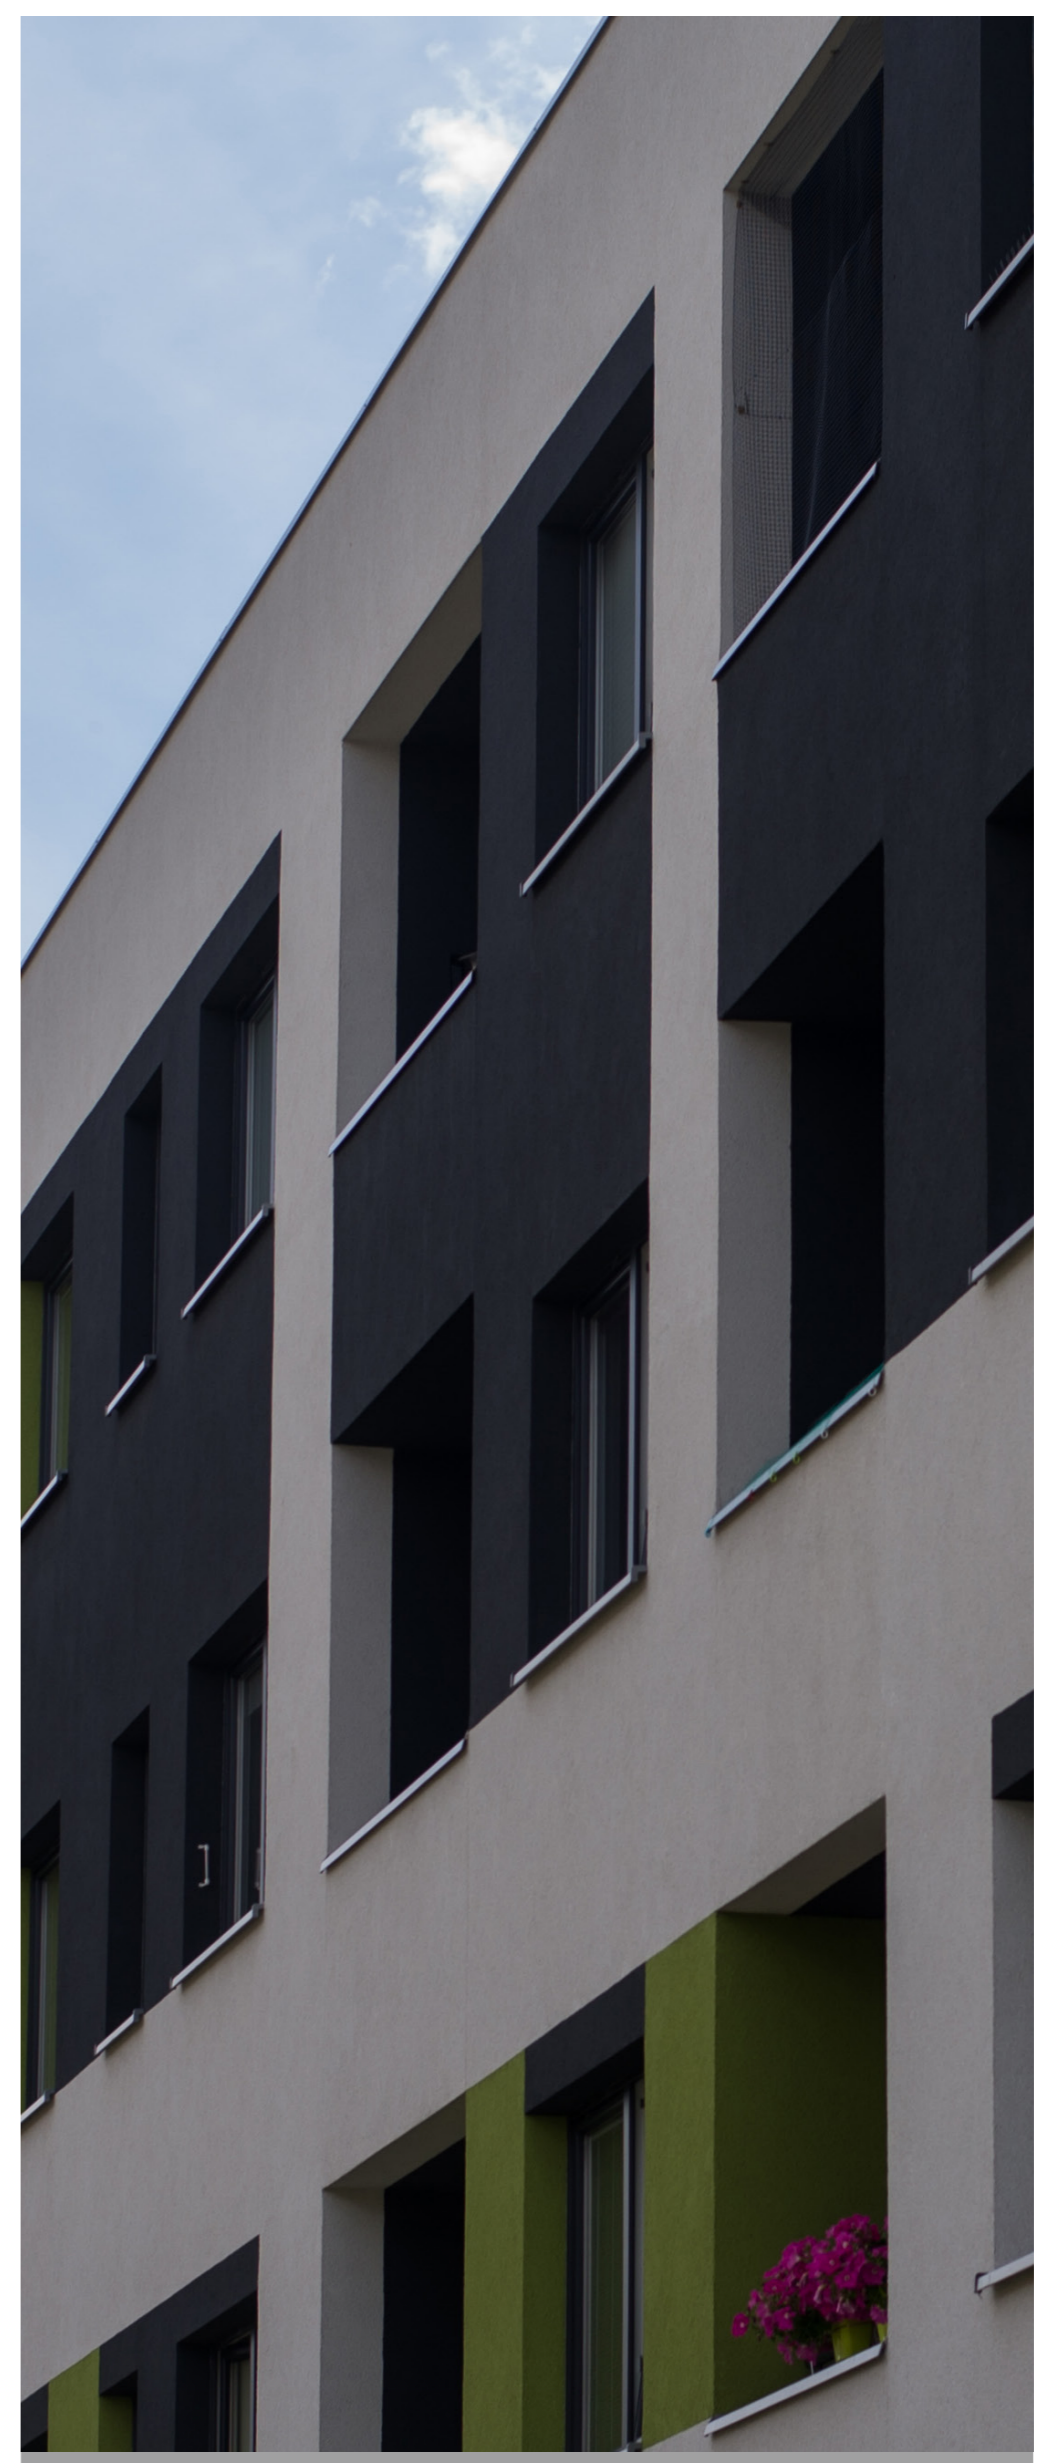

To find out more call 0800 227 339
or visit www.ardex.co.nz

