

## ARDEX AF 236

### Pressure Sensitive Carpet Tile Adhesive

ARDEX AF 236 is an internal acrylic water based pressure sensitive adhesive designed to install carpet tiles and carpet underlay for permanent and semi-permanent applications. ARDEX AF 236 has an excellent coverage when applied using a short nap/medium nap roller and has unlimited working time. **LOW VOC** ★

#### LOCATION

- Internal semi-permanent and permanent installation for carpet tile and dual bond underlay

#### SUBSTRATES

- Hardboard underlay approved to AS 1859, dry concrete with moisture content that complies with AS 1884:2012 or NZS AS 1884, existing resilient flooring as recommended by the carpet tile and carpet pad underlay manufacturer. Contact ARDEX Technical Services for other substrates.

#### FLOOR COVERINGS

- Vinyl backed carpet tile
- Non-vinyl backed carpet tile for permanent application

#### COVERAGE

- Using short to medium nap roller approximately 8-10m<sup>2</sup>/L

#### WORKING TIME

- Unlimited working time for semi-permanent carpet tile installation providing that the adhesive is not exposed to dust and other contaminants

#### SET UP TIME


- 15–30 minutes for semi-permanent carpet tile installation depending on site ambient conditions

#### PACKAGING

- 15L pail containing 15kg of adhesive

#### CODE

12982

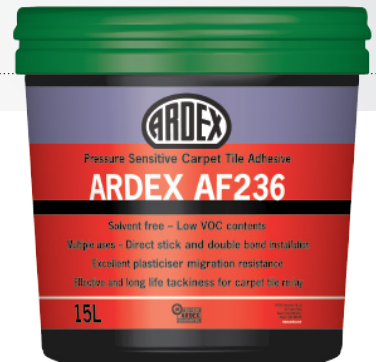

#### ARDEX AF 236 QUICK FACTS

- Solvent free - low VOC
- Multiple Uses - Direct Stick and Double Installation
- Easy and fast application



**CONTACT US**  
1300 788 780 | [www.ardexaustralia.com](http://www.ardexaustralia.com)



**Download the Ardex app**  
(search for 'ARDEX Australia')



**SYSTEMARDEX**  
PREMIUM PERFORMANCE