

TYPICAL PIPE PENETRATION DETAIL - ARDEX WPM 8' SERIES

NOTES


Suitable ARDEX PRIMER include:

- ARDEX WPM 300
- ARDEX WPM 801

ARDEX WPM 8' SERIES:

- ARDEX WPM 812 / WPM 822
- ARDEX WPM 813 / WPM 823

Non-porous substrate preparation:
Mechanically abrade the surface of the metal or PVC surfaces and remove all loose debris. Solvent wipe these surfaces with ARDEX WA 98S and allow to flash off. Prime prepared surfaces with ARDEX WPM 801, and allow to dry between 1 hour – 3 hours. Please ref to the ARDEX WPM 801 product data sheet for further information.

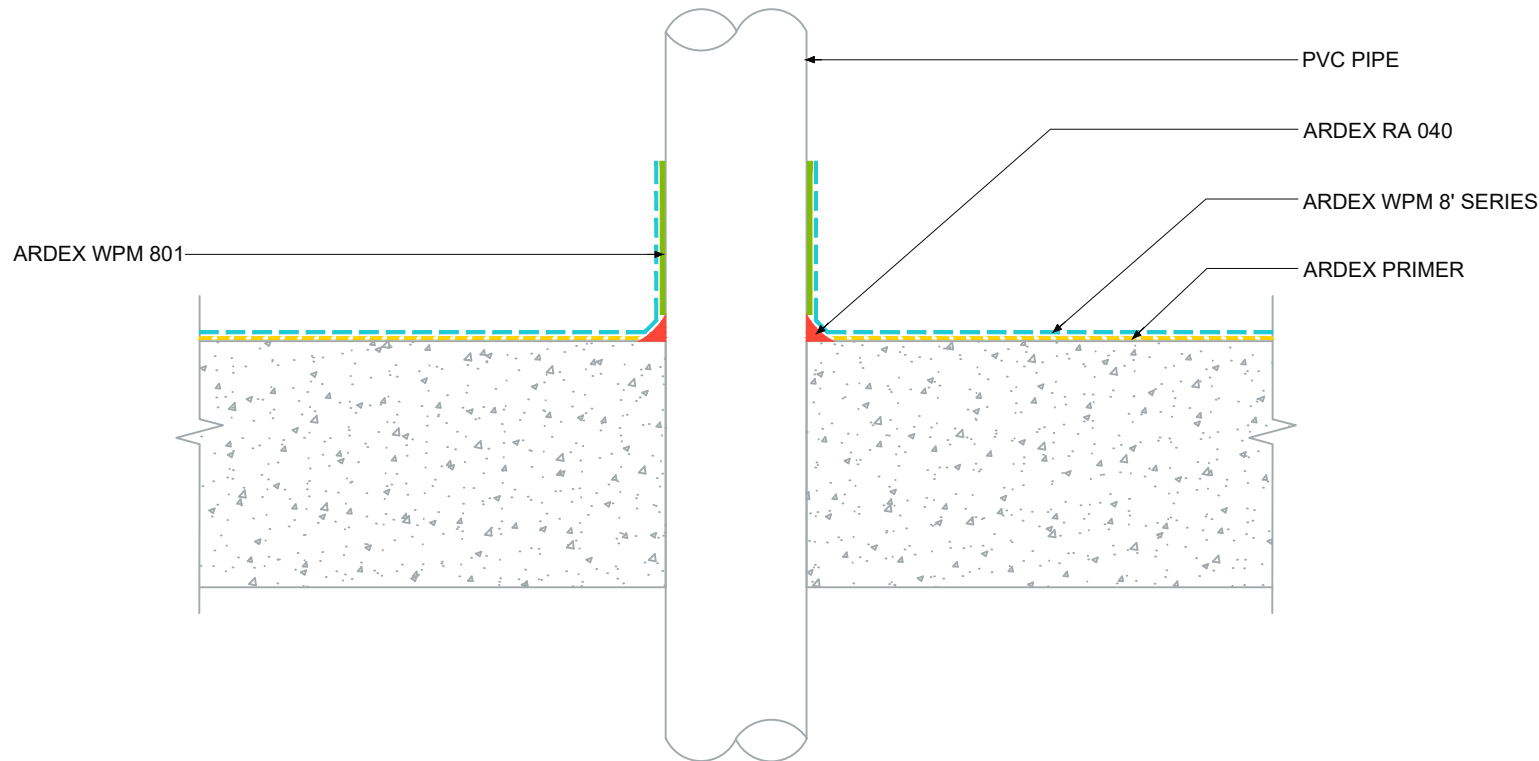

The technical details, recommendations & other information contained in this drawing is given in good faith & represents the best of our knowledge and experience at the time of design. It is your responsibility to ensure that our products are used correctly in accordance with any applicable Australian Standard, our instructions & recommendations are only for the uses they are intended. We also reserve the right to update information without prior notice to reflect our ongoing research and development program. Country specific recommendations, depending on local standards, codes of practice, building regulations and industry guidelines may effect specific installation recommendations. The supply of our products and services are also subject to certain terms, warranties & exclusions which are available to you on request

FILE NAME	TYPICAL PIPE PENETRATION DETAIL - ARDEX WPM 8' SERIES
DRAWN	24/09/2024 by AD
CHECKED	ADAM MCGLONE
SIZE	A4

ARDEX AUSTRALIA
www.ardexaustralia.com

SCALE NTS

DRAWING D172